

Design Objectives



Vehicle Frame Design:

- Minimize Weight
- Integrate Component Mounts

Design Steering System:

- Minimize Frictional Loss

Fluid Power System Design:

- Safe and User-Friendly Operation
- Charging Versatility
- Minimize Fluid Frictional Energy Loss

Electrical Interface Design:

- Ergonomic and Intuitive Controls

Versatile Hydraulic Circuit

- Our custom engineered hydraulic circuit gives the rider unprecedented versatility to charge the accumulator, including: pedal charging, auxiliary electrical charging and regenerative braking
- Ergonomic and safe design was achieved through implementing a solenoid valve and accompanying electrical circuit to allow the rider to regeneratively brake without taking their hands off the handlebars
- A robust and simple electrical circuit was created to actuate the solenoid valve. A high energy density, lithium polymer battery was selected to minimize weight


Handlebar Controls:




Solenoid Valve:



Electrical Circuit:

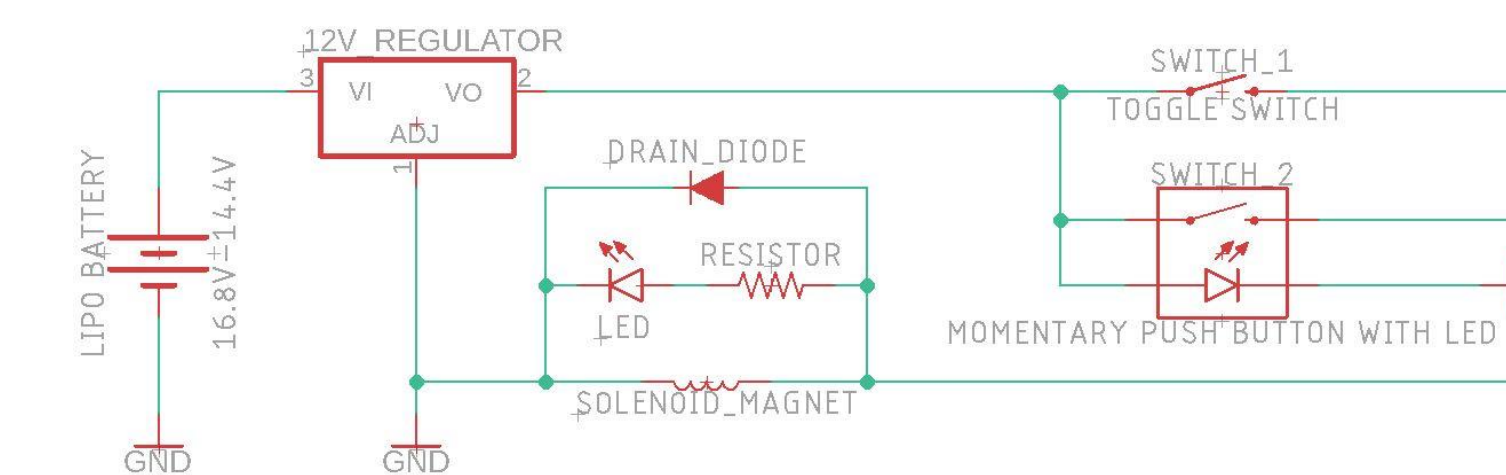

Hydraulic Circuit:

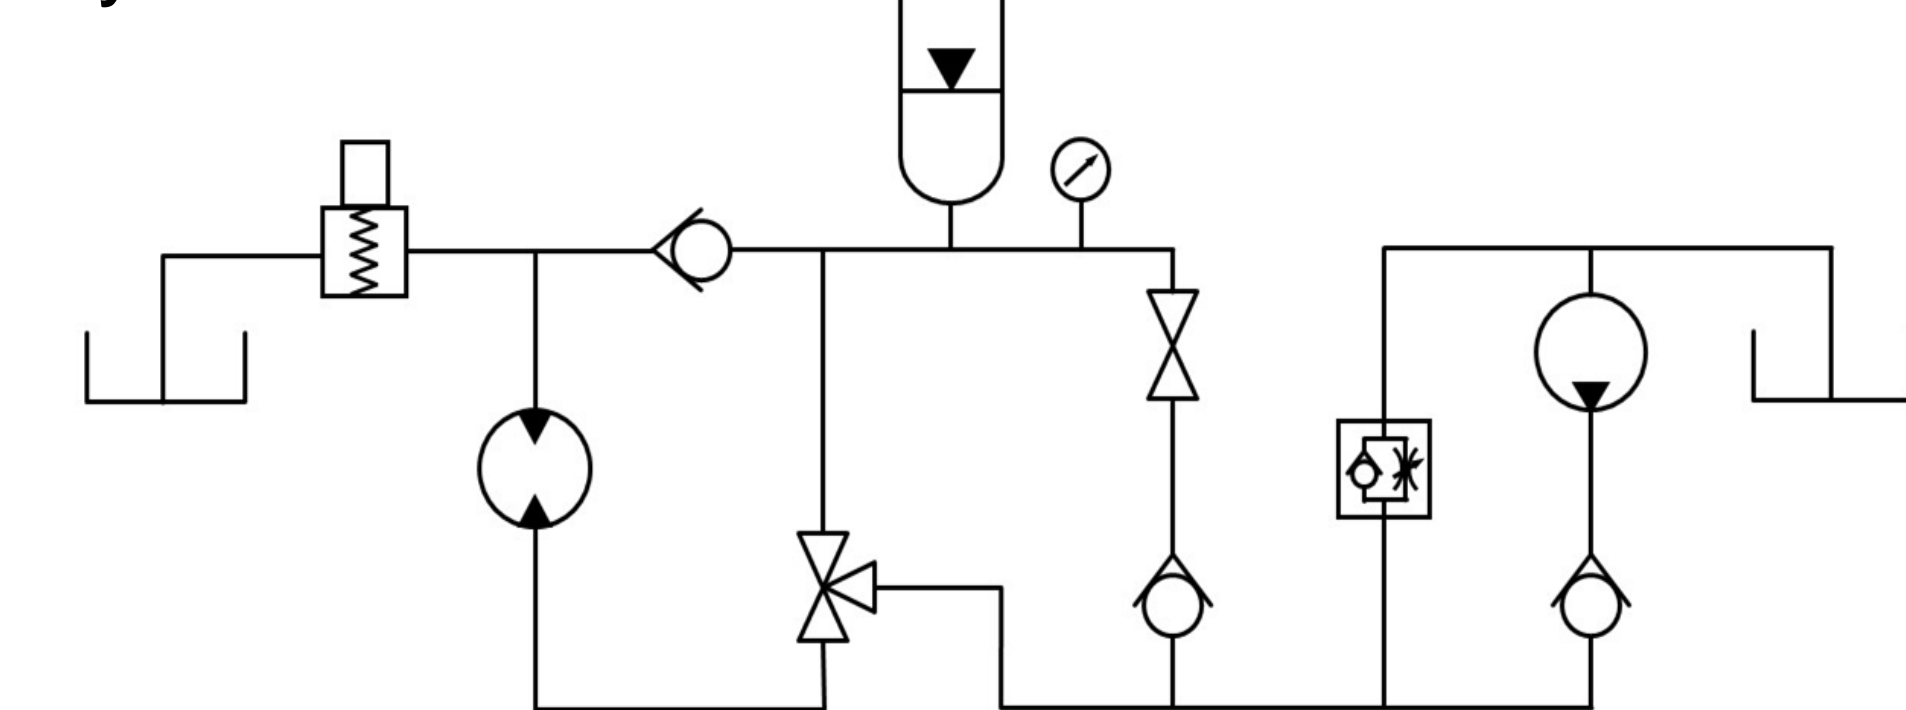


Main Operational Modes:

- Pedal (Direct) Drive
- Accumulator Drive
- Regenerative Braking
- Pedal Charge
- Auxiliary Electric Charge


Custom Carbon Fiber Frame

- Weight reduction was a top priority
- We designed and constructed a custom carbon fiber frame
- The modularity of the carbon tubing granted us flexibility in component mounting
- An FEA analysis was performed on a conservative model of the frame to verify the design

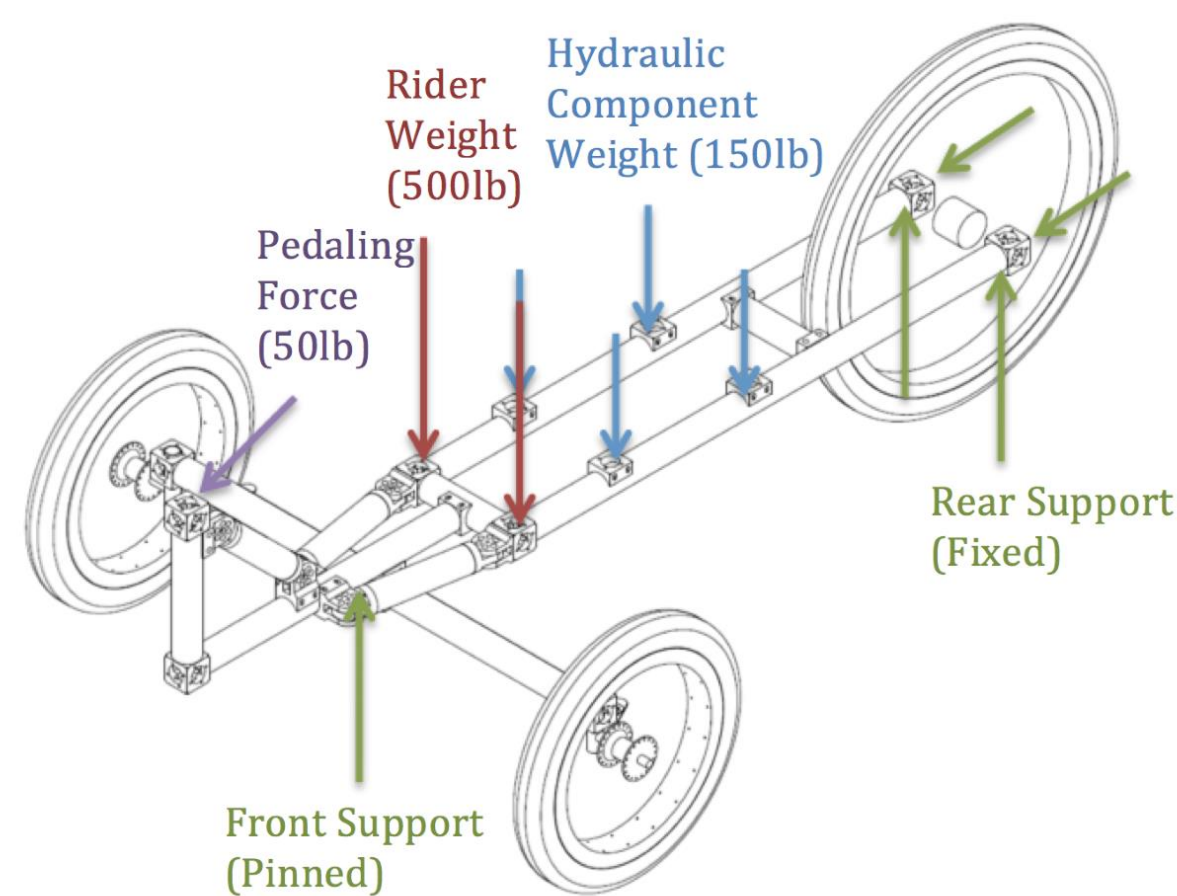



Maximum Stress: 70 MPa

Maximum Deflection: 3 mm

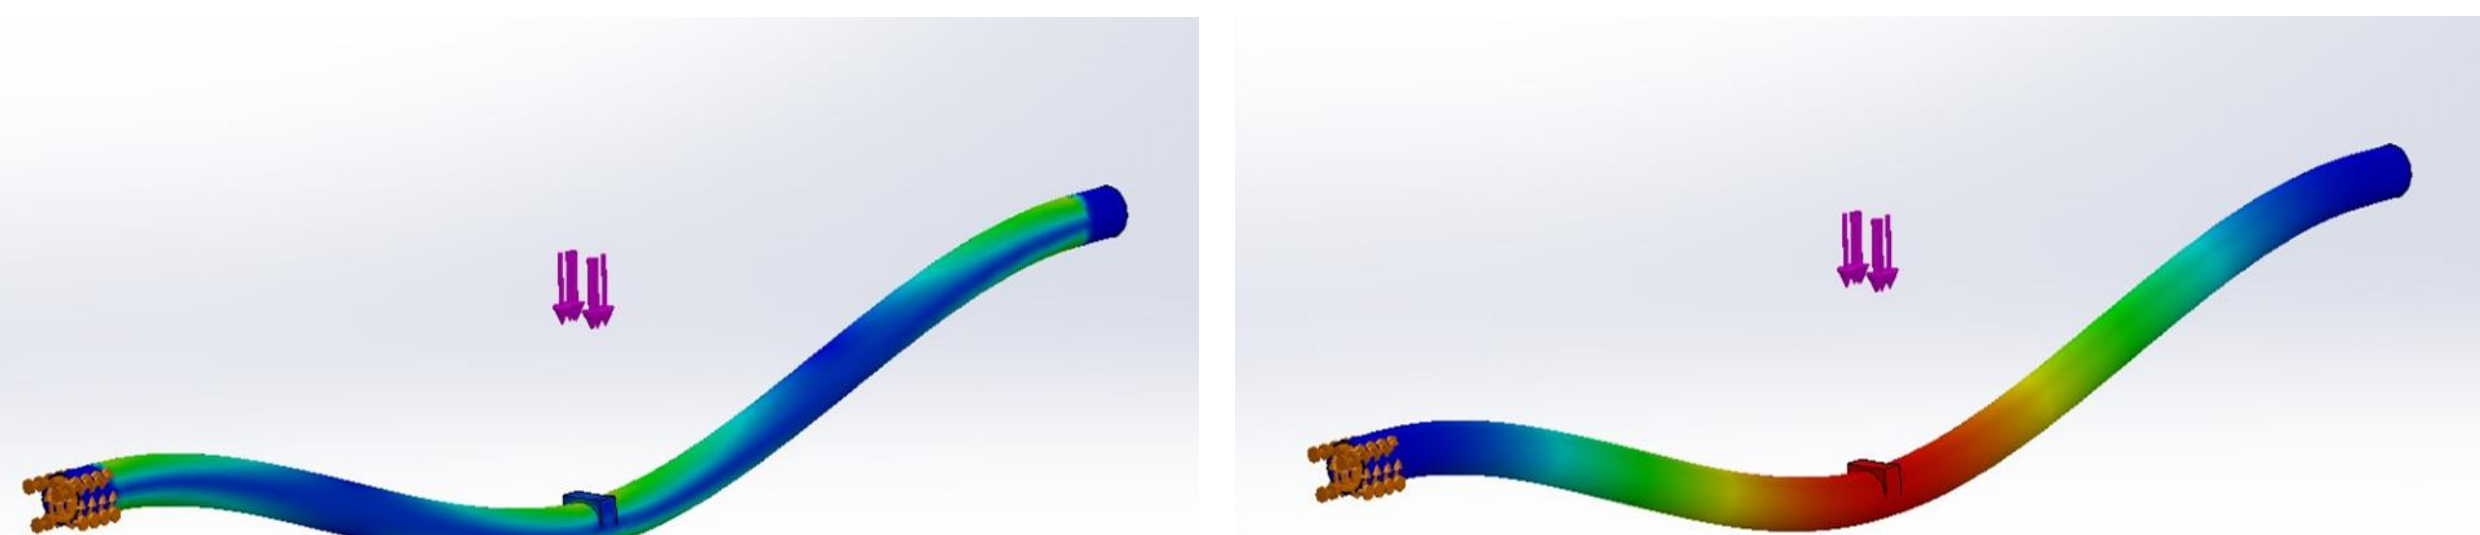

Power Output and Speed Testing

- Vehicle performance for various gear ratios and precharges was tested using a stationary power trainer
- The output power jumps up to a maximum and then decreases exponentially while the pressure in the accumulator drains
- The vehicle accelerates to a maximum speed and then begins decelerating as the power output declines. Once the accumulator is depleted, friction takes over and the vehicle coasts to a stop

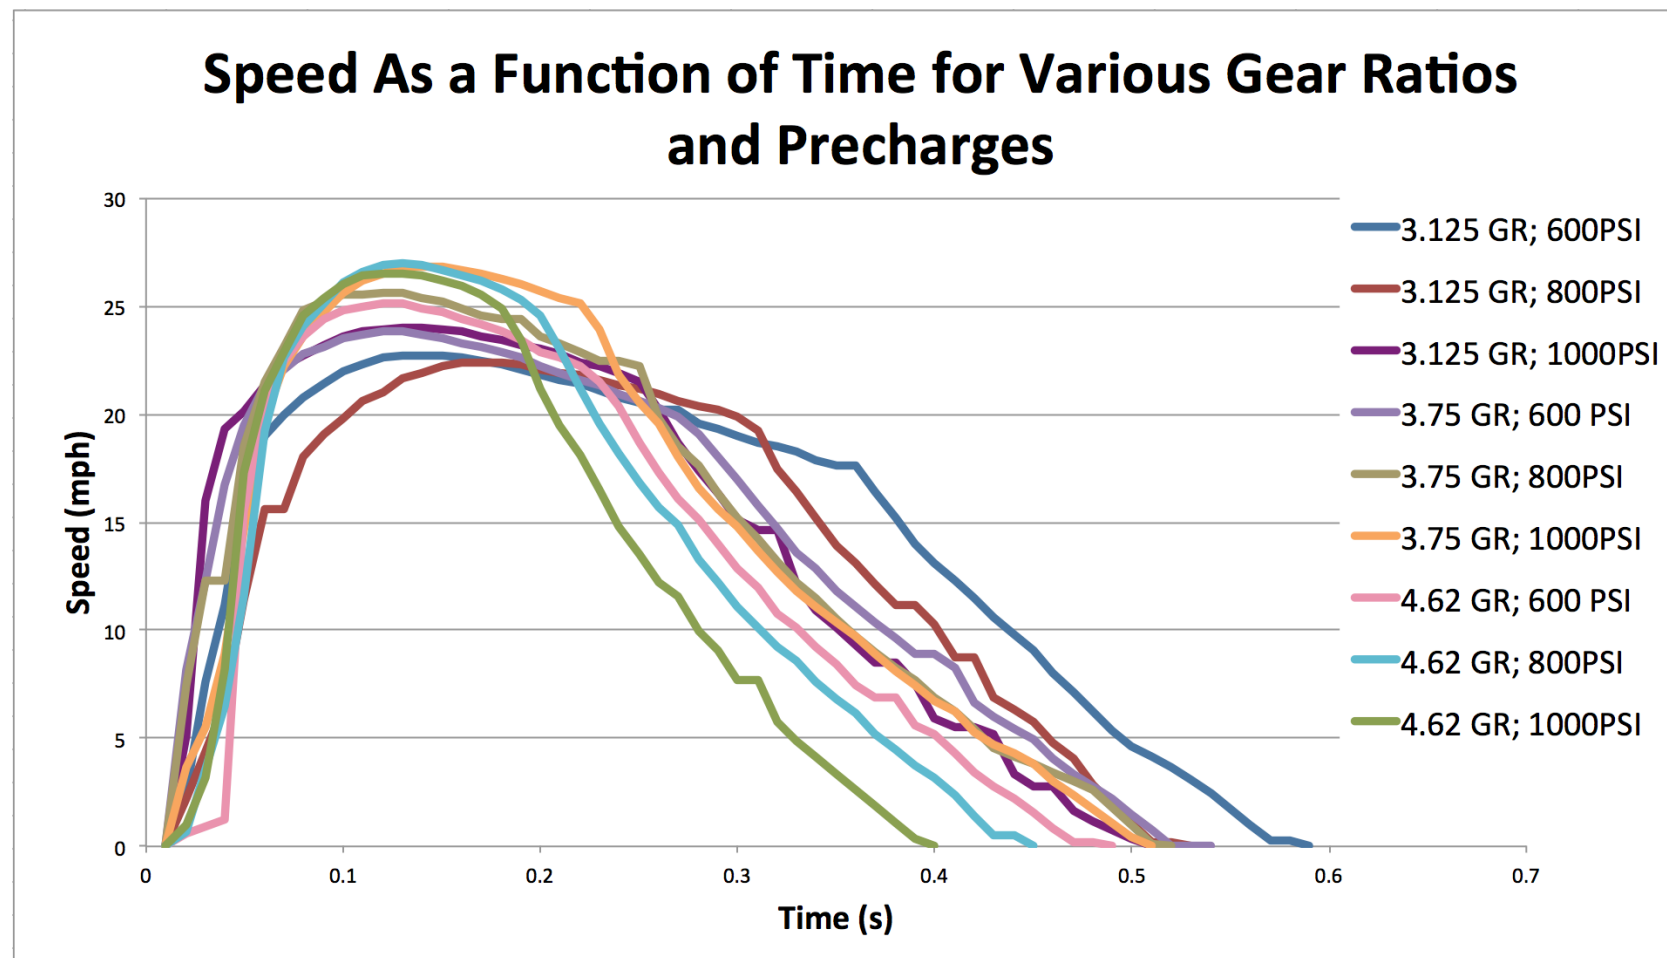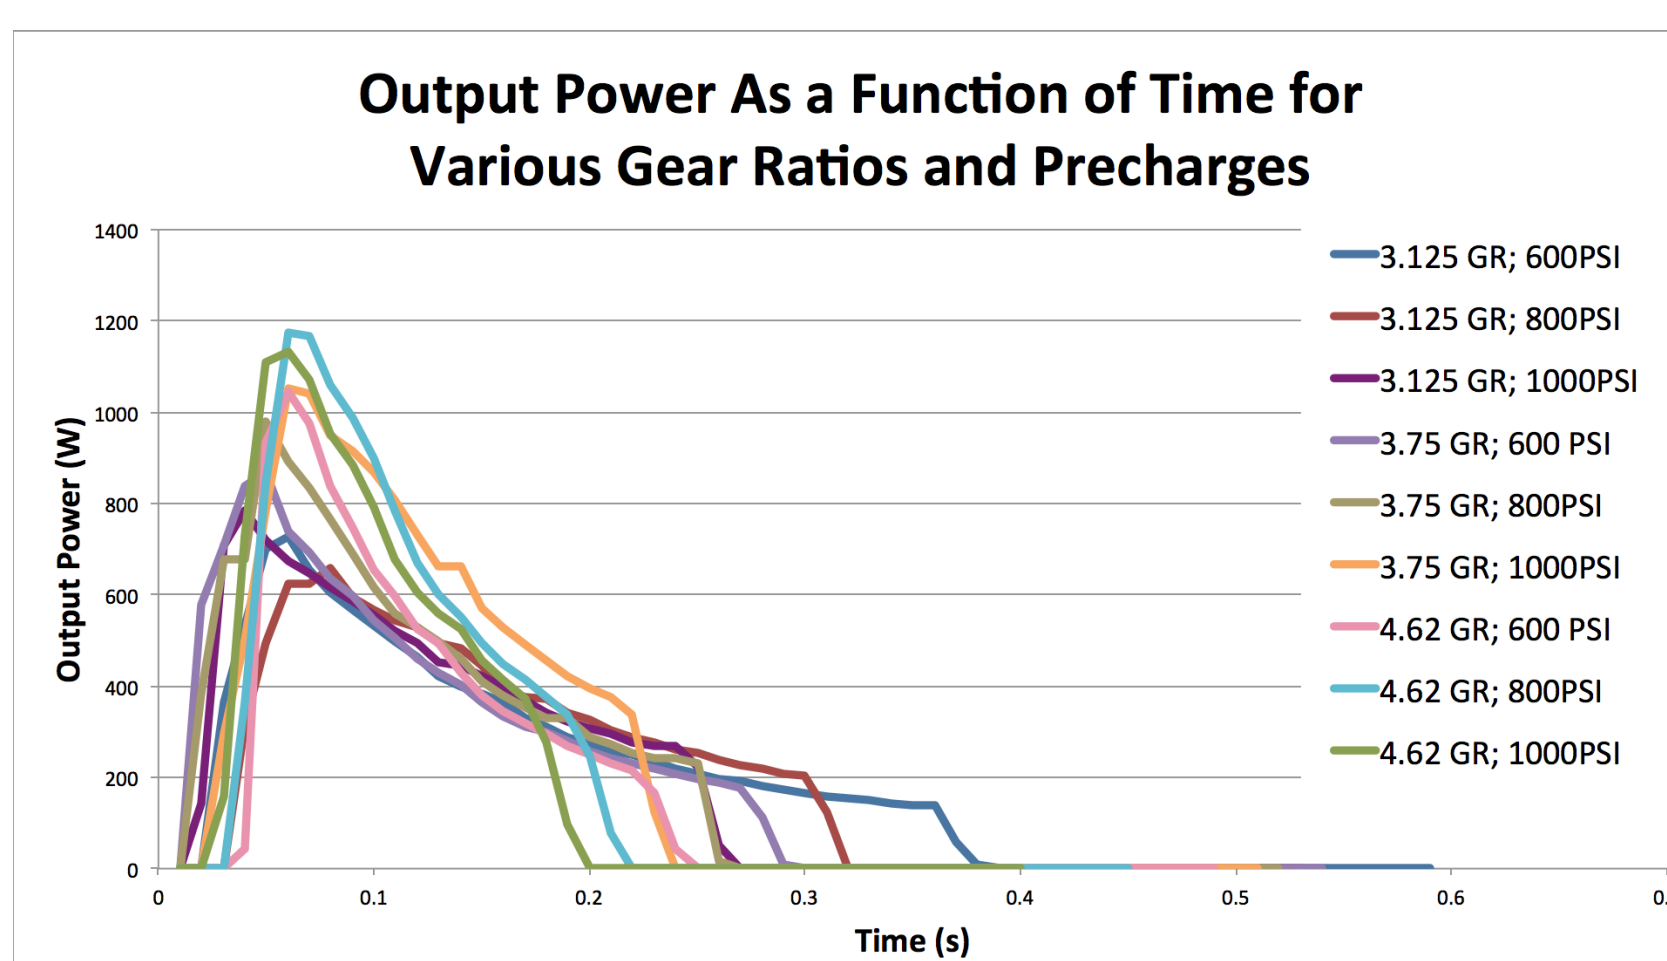


Increasing Gear Ratio:

- Increased torque exerted on the rear wheel leads to a steeper acceleration and allows the bike to reach a higher top speed
- Increased revolutions of the motor per revolution of the rear wheel lead to a higher flow rate which depletes the stored fluid faster


Increasing Precharge:

- An increase in average stored accumulator pressure increases stored energy
- The additional nitrogen in the accumulator decreases the usable oil volume which negatively impacts stored energy

With these effects in mind, a 3.75 rear end gear ratio and 1,000 psi precharge were selected to maximize top speed without sacrificing too heavily on endurance.

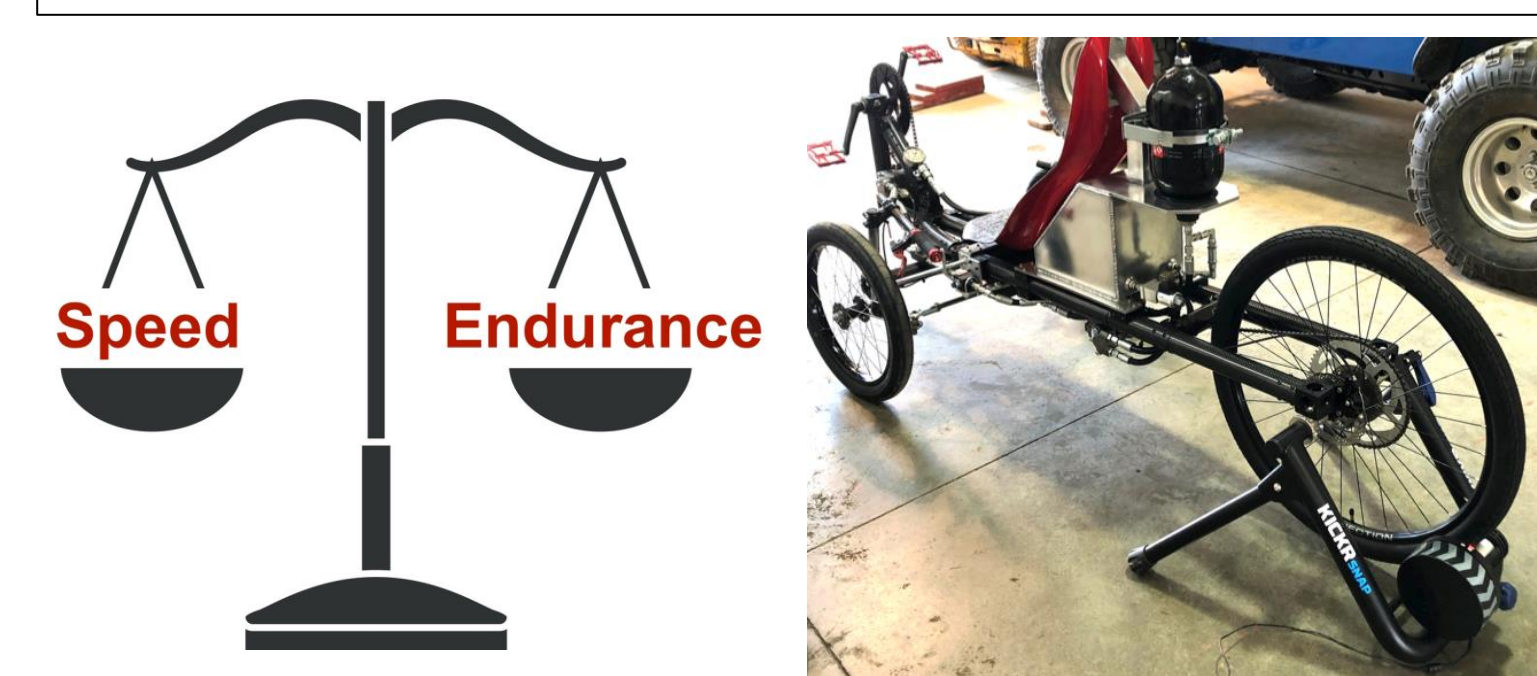

Integrated Hydraulic Reservoir

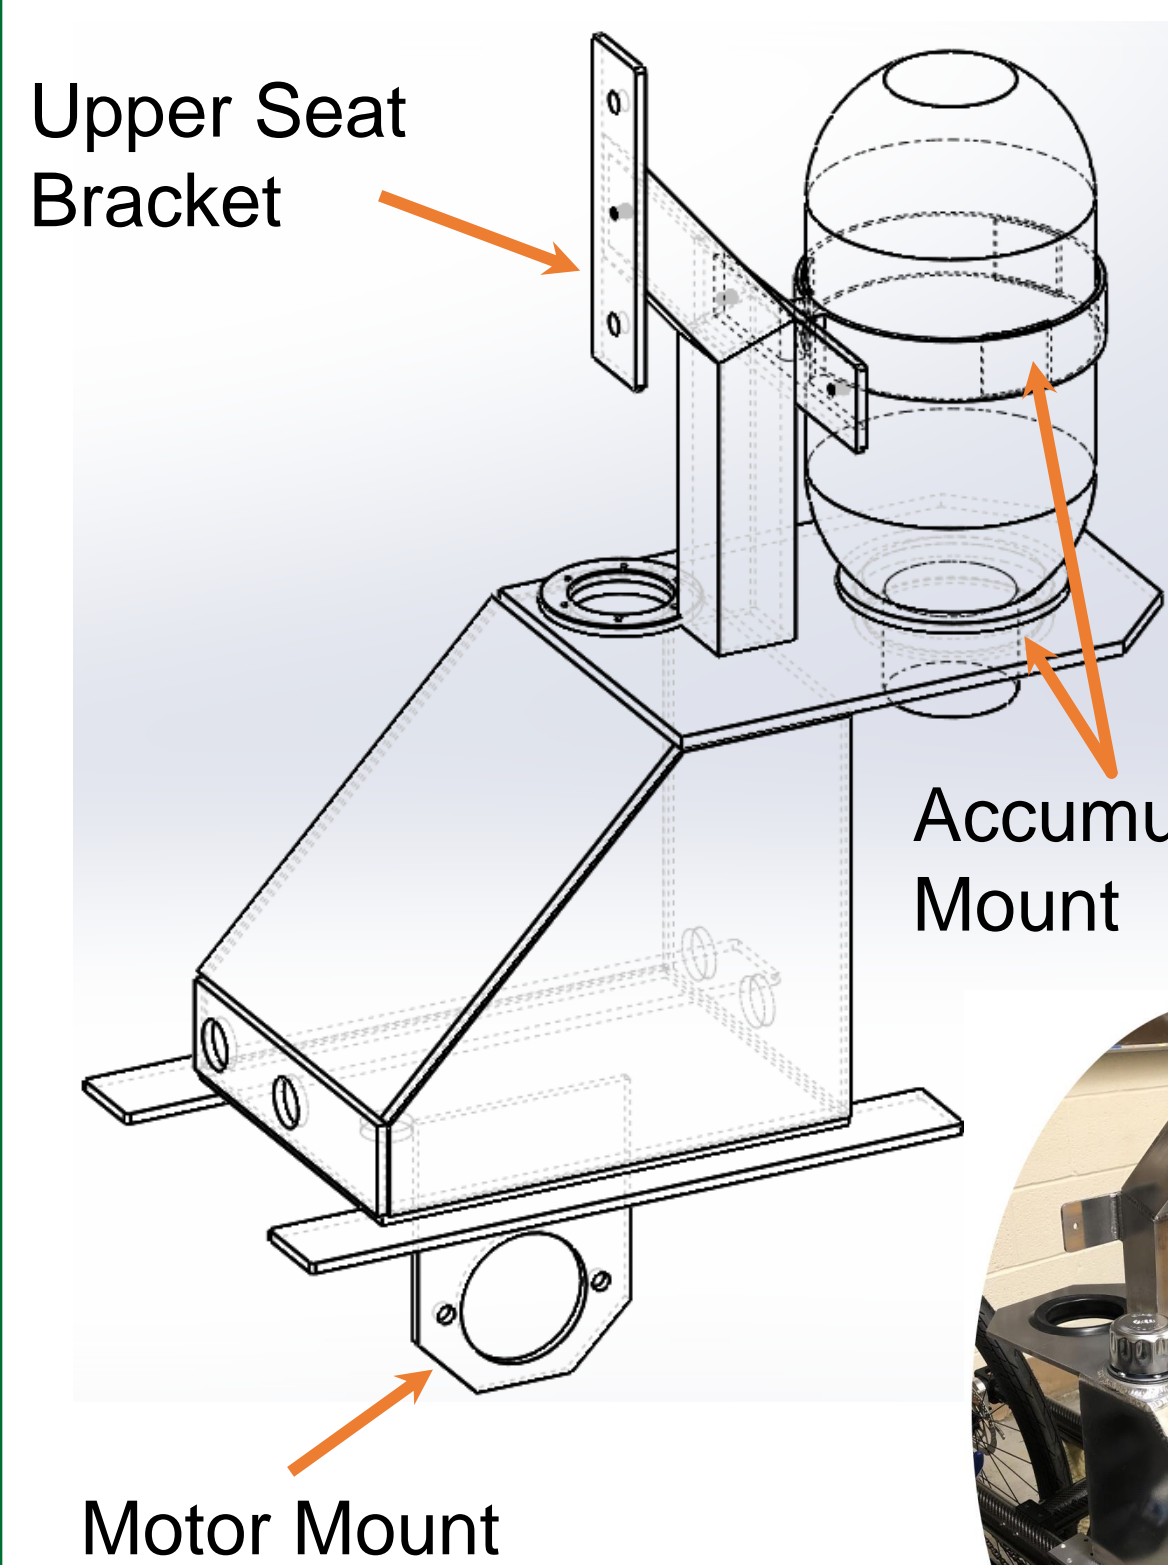

- Our new frame design included the integration of a custom 6061-T6 hydraulic reservoir into the vehicle frame
- In addition to being a structural component, the tank serves as a mount for the seat, accumulator and hydraulic motor
- This eliminates the need for several stand-alone brackets, which adds simplicity and reduces overall weight

Fabricating the Reservoir:



Final Vehicle and Competition



Final Vehicle Performance:



1st Place Overall Champion
2020 NFFPA Fluid Powered Vehicle Challenge


Cleveland State University competed against 14 other universities from across the country including:

- | | |
|-----------------------------------|----------------------------|
| • Purdue University | • Murray State University |
| • University of Cincinnati | • California Polytech |
| • Iowa State University | • Michigan Tech |
| • West Virginia Tech | • University of Denver |
| • Milwaukee School of Engineering | • West Michigan University |
| • University of Akron | • Arizona State University |
| • Colorado State University | • Purdue Northwestern |

- Top Speed: 27 mph
- Curb Weight: 171 lbs
- 600 ft Sprint Time: 11.4 s
- Full Throttle Efficiency: 8%


Optimized Steering Mechanism

Ackerman Steering Condition:

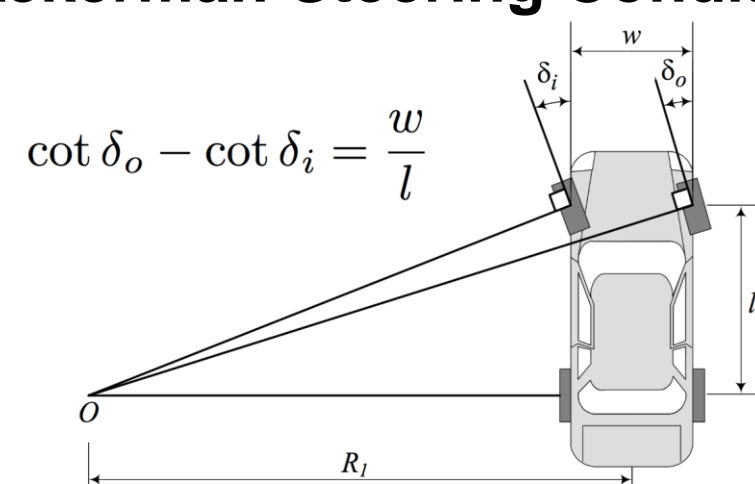

- We created a Matlab program to optimize our trapezoidal steering linkage design to closely approximate Ackerman steering
- The Ackerman condition dictates the relative wheel angles during turning to eliminate wheel slip
- This optimization improved our vehicle's efficiency by minimizing frictional energy losses associated with wheel slip

Trapezoidal Steering Linkage:

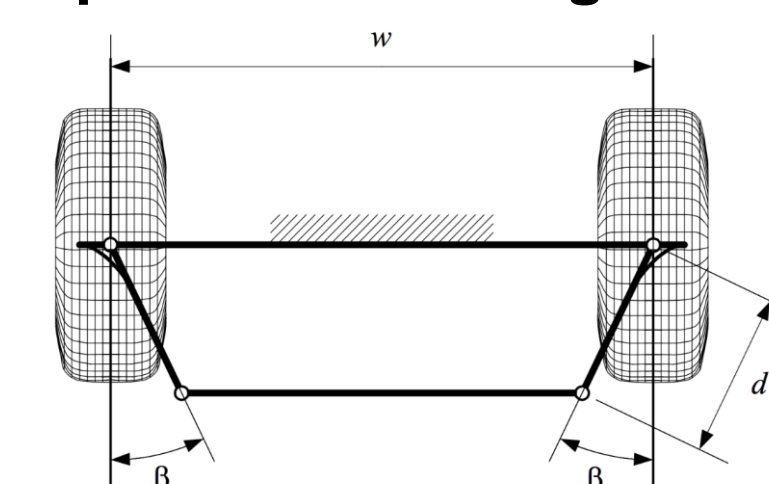

Custom Kingpins:



Steering Assembly:



Jazar, R. N. (2019). Advanced Vehicle Dynamics. Cham: Springer International Publishing.

Acknowledgements

Special thanks and gratitude to Bogdan Kozul and George Germann for their tireless help and invaluable knowledge. We would also like to thank our sponsors: the National Fluid Power Association, Parker Hannifin, Core Wire, WC Engineering, Bearing Services, Steelhead Composites, Rockwest Composites, Superior Beverage and DYO